




WILTON CARPETS

READY TO GO

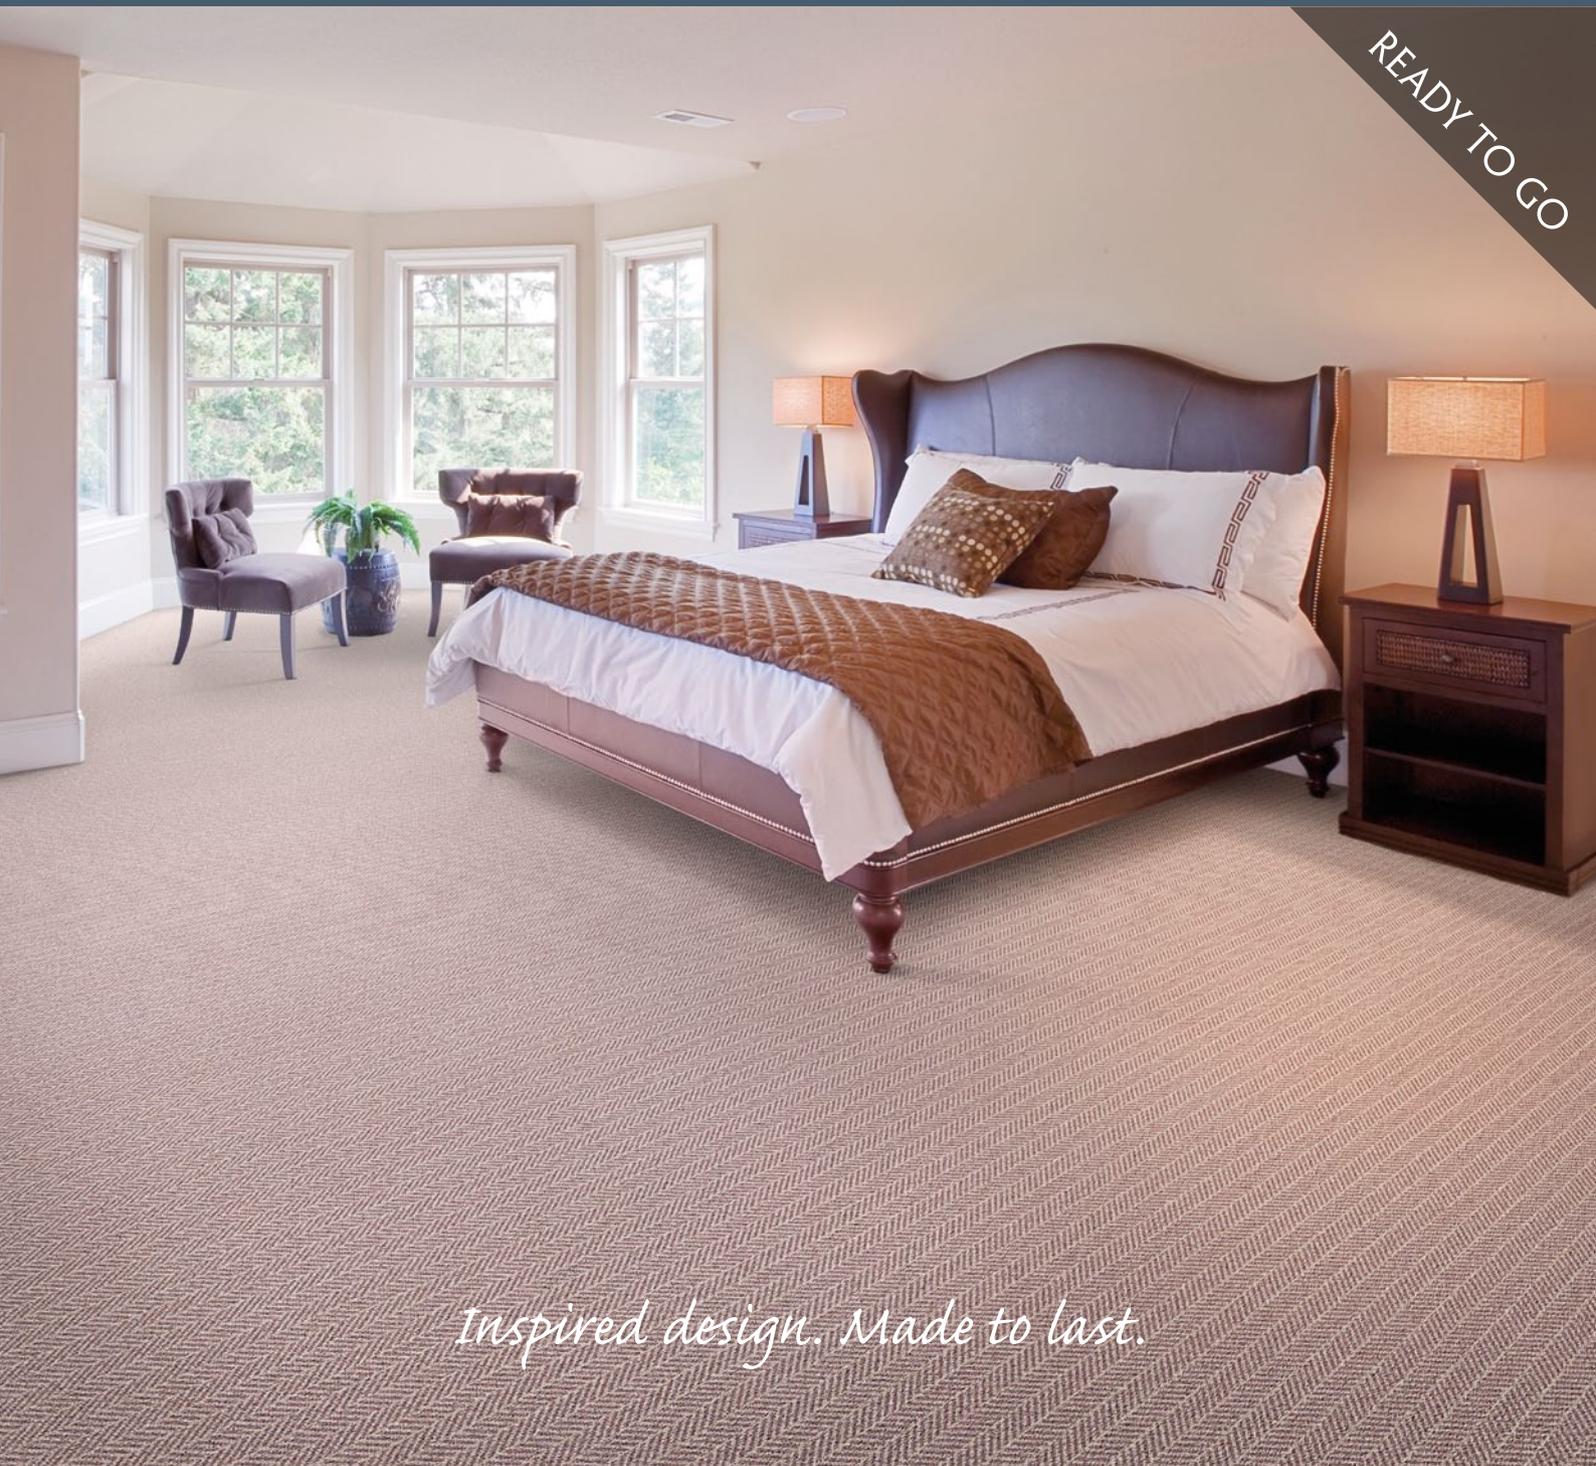

Inspired design. Made to last.

THE TAILORED COLLECTION

THE TAILORED COLLECTION


HOUNDSTOOTH & HERRINGBONE


While houndstooth was first woven for 19th Century Scottish shepherds, the herringbone pattern can trace its origins to Ancient Rome, signifying the enduring appeal of this heritage collection, refashioned with a twist and velvet contrast texture.

The twist pile and velvet finish reflect the light differently adding to the interest generated by the colour to give a multi-dimensional element to the pattern in this range.


Warm browns and purple hues, offset with zesty elements make this range both sophisticated and fun.

This tufted range is part of the Ready To Go collection and is in stock now for speedy turnaround. At 40oz and with the 80/20 wool to nylon ratio providing optimum comfort with durability, this range also offers superb lifetime value in higher traffic areas.

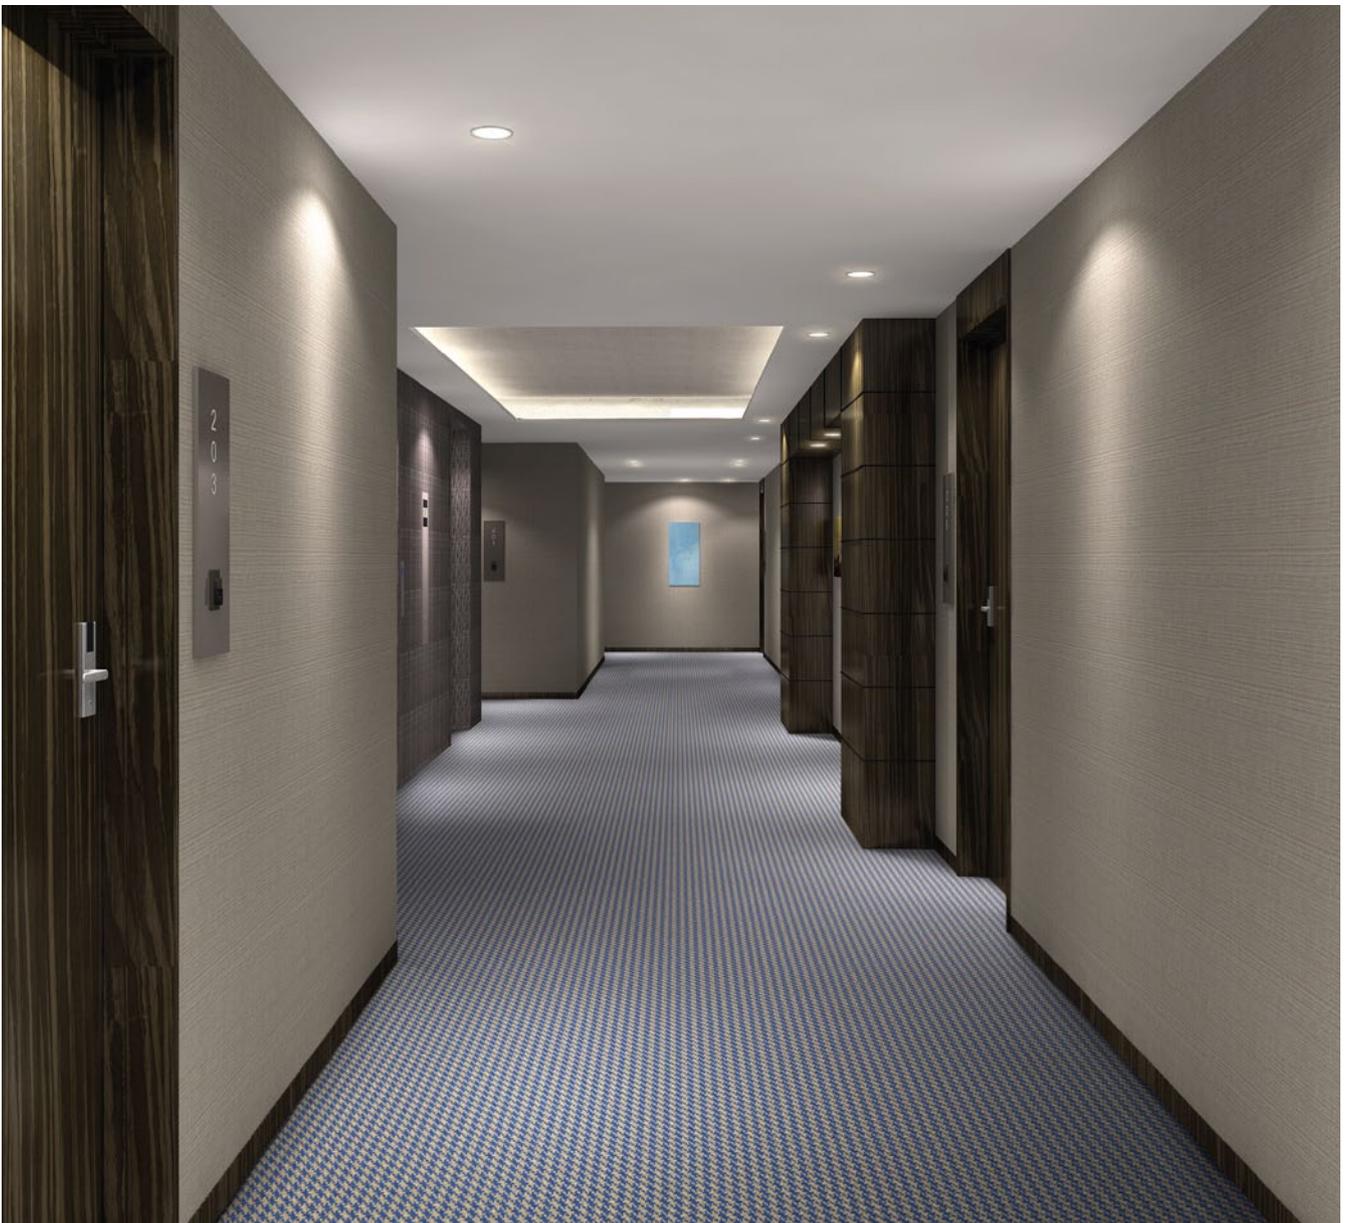


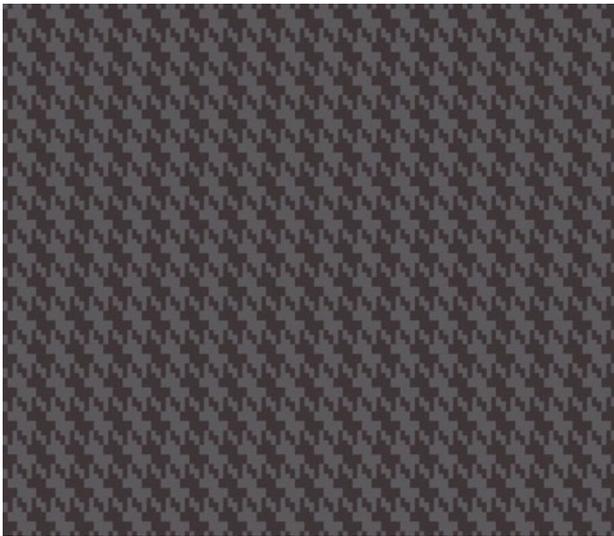


HOUSTOOTH **Huntsman** 350/50266

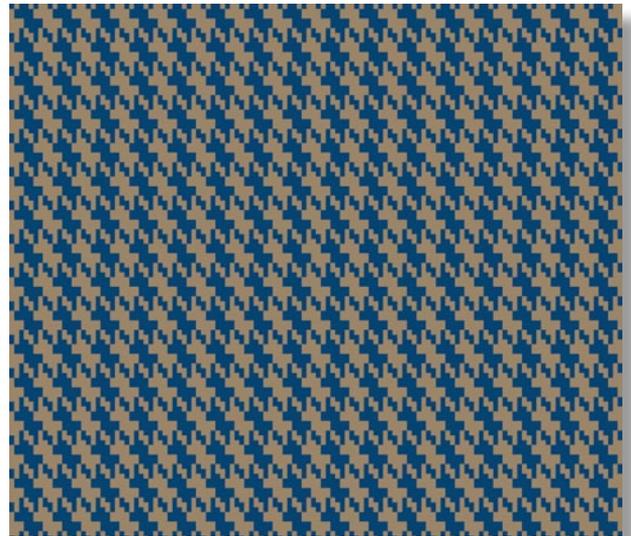


HOUSTOOTH **Barrie** 351/50266

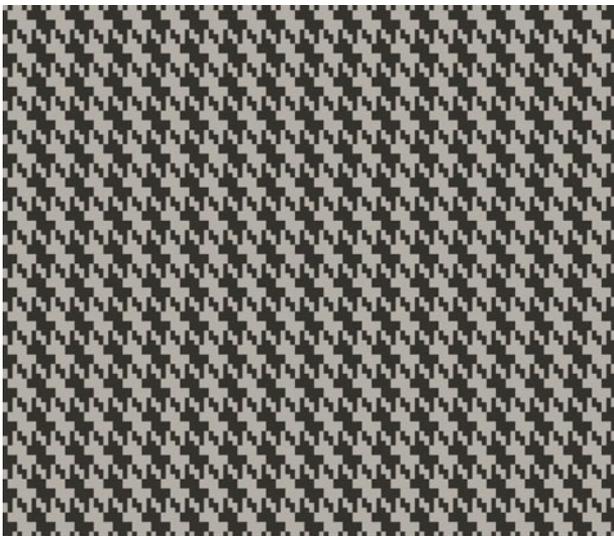


HOUSTOOTH **Kilgour** 352/50266

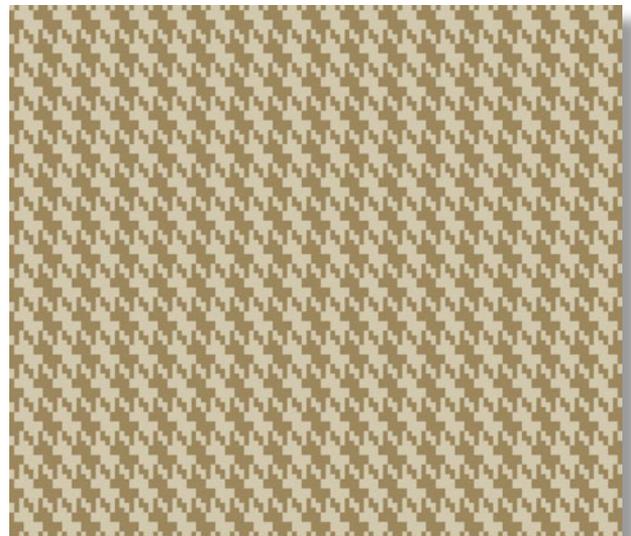


HOUSTOOTH **Sexton** 353/50266

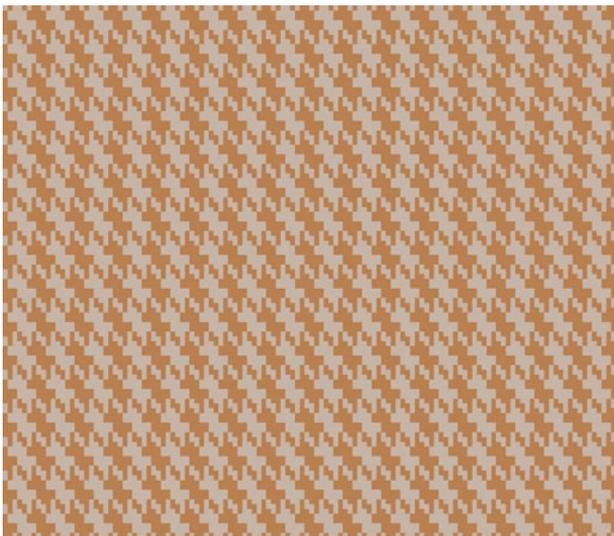

HOUSTOOTH **Anderson** 354/50266

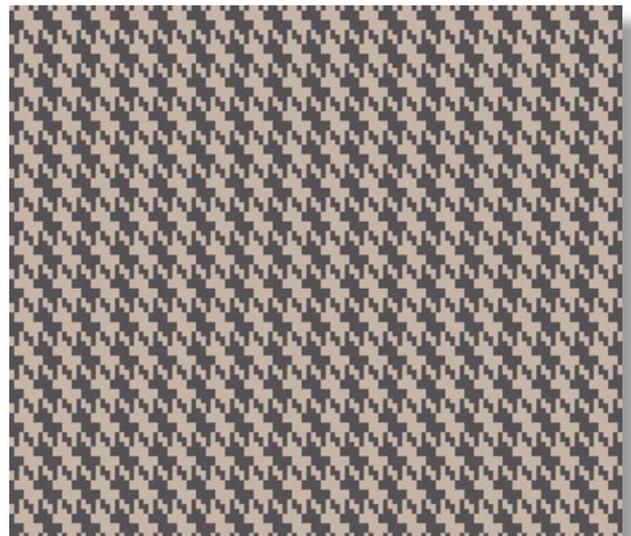


HOUSTOOTH **Sheppard** 355/50266

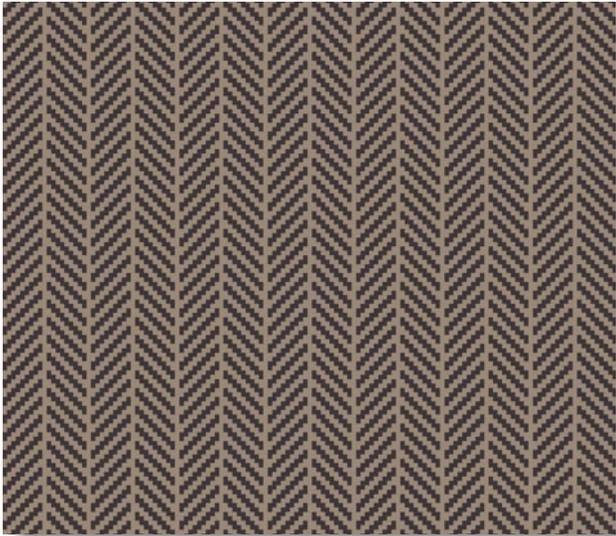

HERRINGBONE **Morgan** 340/50265




HERRINGBONE **Strauss** 341/50265

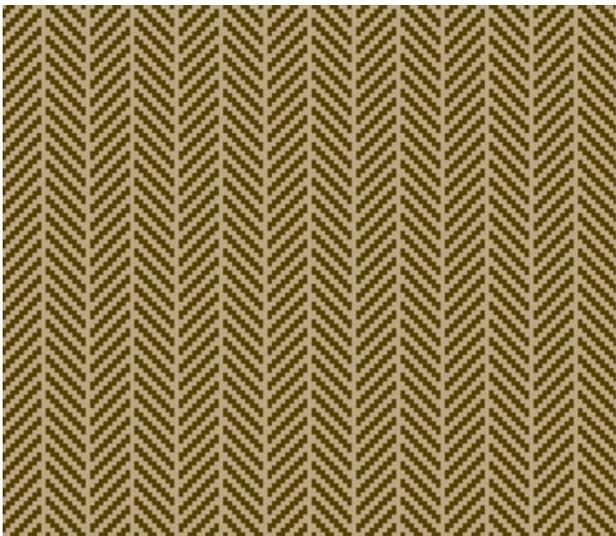


HERRINGBONE **Everest** 342/50265



HERRINGBONE **Davis** 343/50265

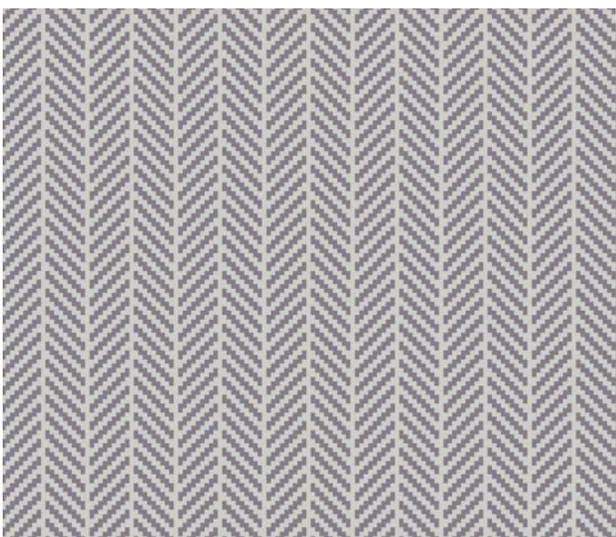

HERRINGBONE **Fielding** 344/50265

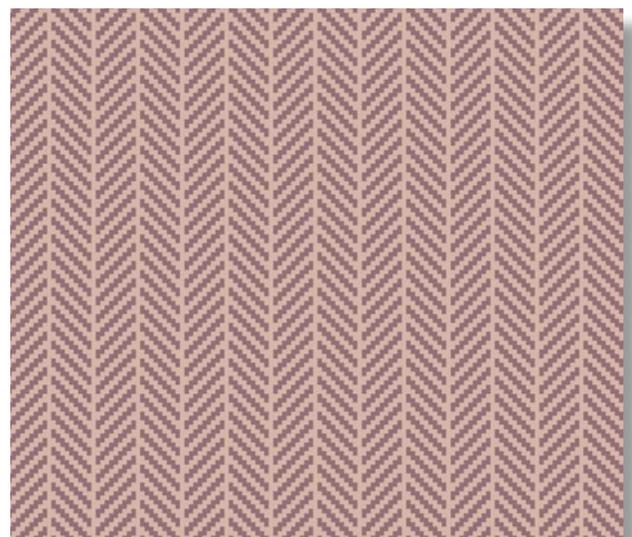

HERRINGBONE **Poole** 345/50265

THE TAILORED COLLECTION

Construction	Tufted
Pile content	80% Wool 20% Nylon – BS 3655
Pitch	31.5 per 10cm (8 per inch)
Pile weight	1356gms/m ² (40oz per sq yd) ISO 8543 – BS 4223 +/- 10%
Backing	Primary – Polypropylene
Width	4.00m (13ft 1.5 inches) ISO 1765 – BS4223
Thickness	7.00mm +/- 1mm (0.35 inches) ISO 1765 – BS 4223
Total weight	2369gms/m ² (75oz per sq yd) ISO 8543 – BS4223
Suitability for use	Very heavy contract
	The above details are subject to normal commercial tolerances. A fully detailed specification for this product can be made available by application to The Wilton Carpet Factory Limited.
Fire test	Radiant panel ISO 9239-1 Smoke Generation EN ISO 11925-2
Fire classification	Cfl s1 CE EN 14041:2004
Colour fastness	Wet 3-4 (Scale 1-5)
Installation	 In accordance with BS 5325:2001 or any later revision – Installation of textile floor coverings – Code of practice
Maintenance	Please refer to The Wilton Carpet Factory Ltd for full maintenance advice.



WILTON CARPETS

The Wilton Carpet Factory Limited

Minster Street, Wilton, Salisbury
Wiltshire SP2 0AY

t 01722 746000 **f** 01722 742923

e sales@wiltoncarpets.com

www.wiltoncarpets.com

ISO 9001 (2015) Quality Assurance Certified

© Copyright The Wilton Carpet Factory Limited All copyright, design rights and intellectual property rights existing in our designs are and will remain the property of The Wilton Carpet Factory Limited. Any infringement of these rights will result in appropriate legal action. Colours are reproduced within the limits of the printing process.